

Vertex S+

DUAL GLASS MONOCRYSTALLINE MODULE

PRODUCT: TSM-NEG9.28

PRODUCT RANGE: 410-430W

430W


MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

22.2%

MAXIMUM EFFICIENCY

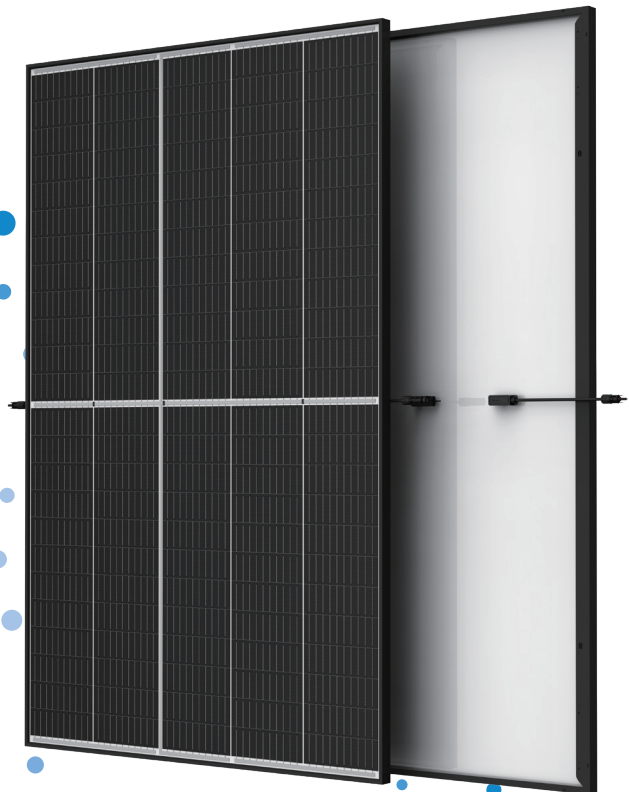

Small in size, bigger on power

- Up to 430W, 22.2% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping, lower series resistance, improved current collection and enhanced reliability
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



Dual-glass Design, more secure and sustainable

- Upgraded dual glass of Vertex S, less prone to micro-cracks and scratches on the back during installation
- Double-glass + innovative non-destructive cutting for improved mechanical resistance and strength
- Excellent fire rating, weather resistance, salt spray, sand dust, ammonia performance which is fully applicable in coastal, high temperature, humidity area and harsh environment



Ultra-low Degradation, longer warranty, higher output


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 30 years power warranty



Universal solution for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load

Trina Solar's Dual Glass Performance Warranty

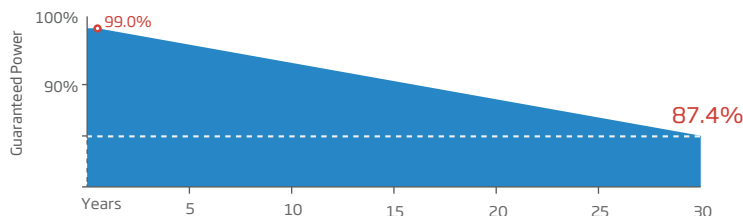


Comprehensive Products and System Certificates




ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

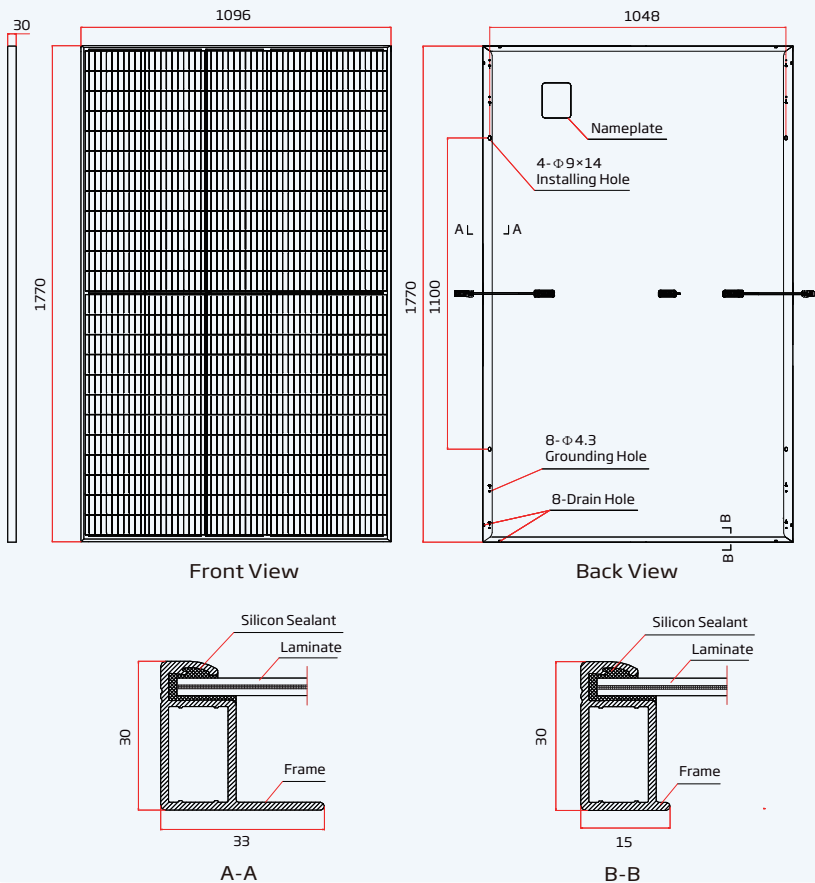

I-V CURVES OF PV MODULE(415 W)

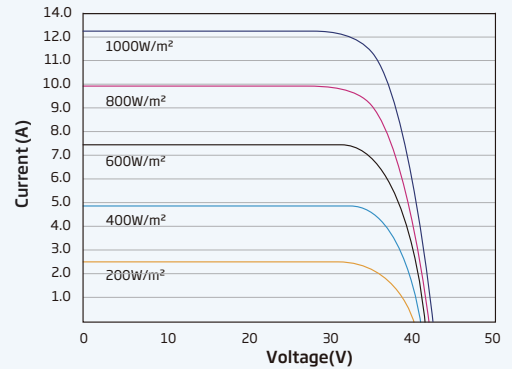

P-V CURVES OF PV MODULE(415W)

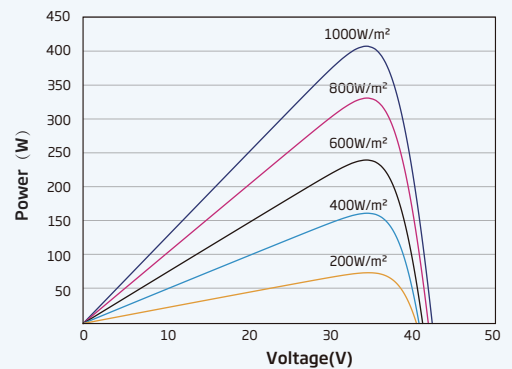

ELECTRICAL DATA (STC)

Parameter	410	415	420	425	430
Peak Power Watts-P _{MAX} (Wp)*	410	415	420	425	430
Power Tolerance-P _{MAX} (W)			0 ~ +5		
Maximum Power Voltage-V _{MPP} (V)	35.7	36.0	36.3	36.6	36.9
Maximum Power Current-I _{MPP} (A)	11.48	11.52	11.57	11.61	11.66
Open Circuit Voltage-V _{OC} (V)	42.4	42.7	43.1	43.4	43.7
Short Circuit Current-I _{SC} (A)	12.23	12.27	12.33	12.37	12.41
Module Efficiency η _m (%)	21.1	21.4	21.7	21.9	22.2

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Parameter	312	316	320	324	328
Maximum Power-P _{MAX} (Wp)	312	316	320	324	328
Maximum Power Voltage-V _{MPP} (V)	33.3	33.6	33.9	34.2	34.5
Maximum Power Current-I _{MPP} (A)	9.36	9.40	9.45	9.48	9.51
Open Circuit Voltage-V _{OC} (V)	40.2	40.5	40.8	41.1	41.4
Short Circuit Current-I _{SC} (A)	9.86	9.89	9.94	9.97	10.00

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	1770×1096×30 mm (69.06×43.15×1.18 inches)
Weight	21.5 kg (47.4lb)
Front Glass	1.6 mm (0.06 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Back Glass	1.6mm(0.06 inches), Heat Strengthened Glass
Frame	30mm (0.06 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	MC4 EVO2 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.30%/°C
Temperature Coefficient of V _{OC}	-0.24%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	20A

WARRANTY

25 year Product Workmanship Warranty
30 year Power Warranty
1% first year degradation
0.4% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 36 pieces
Modules per 40' container: 936 pieces